



Loudoun County, Virginia

Department of Management and Financial Services
Division of Procurement
MSC #41C
1 Harrison Street, SE, 4th Floor
Leesburg, Virginia 20175
www.loudoun.gov/procurement

September 17, 2007

NOTICE TO BIDDERS

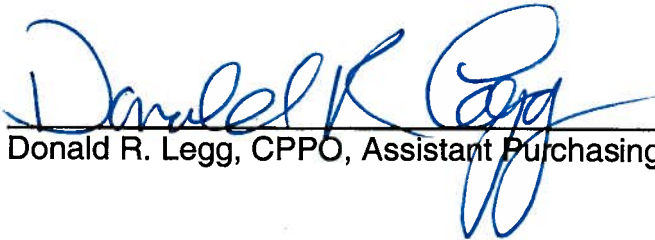
ADDENDUM NO. 2

QQ-01351

The following changes and/or additions shall be made to the original Invitation For Bid No. QQ-01351, Loudoun County Entrance Road Paving. Please acknowledge receipt of this addendum by signing and returning with your bid.

1. Please replace the existing pricing form with the new pricing form available on the web site.
2. **Please note the change in the acceptance date from prior to 4:00 PM, September 19, 2007 to prior to 4:00 PM, September 21, 2007.**

Prepared By:


Donald R. Legg, CPPO, Assistant Purchasing Agent

Date:



Acknowledged By: _____ Date: _____

LOUDOUN COUNTY
OFFICE OF SOLID WASTE MANAGEMENT

FORM OF BID

LOUDOUN COUNTY LANDFILL
WOODS ROAD UNIT ENTRANCE ROAD

PLEASE FURNISH, COMPLETE, IN PLACE, THE FOLLOWING:

			BASE BID			
ITEM NO.	ITEM CODE	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	AMOUNT
1	All Specification Sections	Mobilization and Demobilization, including Bonds, Permits, and Equipment, Required items that are not specifically identified in this Form of Bid (Not to Exceed 5% of Total Amount)	LS	LS		
2	2200	Unclassified excavation (includes all labor, materials, incidentals, and equipment necessary to excavate and embankment-fill or stockpile unclassified excavation material, common excavation, and other excavation shown on the drawings; fine grade as required, see plan sheet 4)	100	CY		
3	2200	Embankment Fill-owner furnished (contractor to coordinate with owner as required) (includes all labor, incidentals, and equipment to transport, compact and test material in fill areas; fine grade as necessary, see plan sheet 4)	100	CY		
4	2200	Leveling Course Aggregate-(includes all labor, incidentals, and equipment necessary to furnish and install leveling coarse aggregate, see details 1-5 plan sheet 9)	4,600	SY		
5	2200	Aggregate Base (includes all labor, incidentals, and equipment necessary to furnish and install aggregate base, see details 1-5 plan sheet 9)	100	CY		
6	2200	Coarse Aggregate (includes all labor, incidentals, and equipment necessary to furnish and install coarse aggregate, see details 1-5 plan sheet 9)	100	CY		
7	2275	Geotextile (includes all materials, labor, incidentals, and equipment necessary to furnish and install the Geotextile, see detail 5 plan sheet 9)	4,500	SF		
8	2555	Existing Asphalt Concrete Pavement-Milling (approximate thickness range 4"-6") (includes milling, hauling and reusing as leveling coarse aggregate, see plan sheet 4, and detail 5 plan sheet 9)	500	SY		
9	2555	Asphalt Concrete Pavement- BM-25 (3" thick)(includes labor, material, incidentals, and equipment necessary to construct the pavement section including asphalt and grading work, see details 1-6 plan sheet 9)	6,500	SY		
10	2555	Asphalt Concrete Pavement- BM-9.5 (1.5" thick)(includes labor, material, incidentals, and equipment necessary to construct the pavement section including asphalt and grading work, see details 1-6 plan sheet 9)	5,500	SY		
11	2555	VDOT UD-4 (includes all labor, material, equipment, testing, incidentals to complete the work, including all trenching, backfill, bedding material, geotextile, pipe, cleaning, and all other work required, see details 1-4 plan sheet 9)	4,000	LF		

			BASE BID			
ITEM NO.	ITEM CODE	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	AMOUNT
12	2555	PAVEMENT MARKING (includes all labor, material, equipment, testing, incidentals to complete the work, see plan sheet 6.)	1	LS		
13	Per Plan see sheet 4	SPEED BUMPS (includes all labor, material, equipment, testing, incidentals to complete the work)	6	EA		
14	Per VDOT Standards	EC-3 Soil Stabilization Mat (includes all labor, incidentals, materials, and equipment necessary for furnishing, installing, and maintaining erosion and sediment control device)	720	SY		
15	Per VDOT Standards	CG-2 curb (Section 201.01 of the Road and Bridge Standards, Volume I)(includes all labor, material, equipment, testing, incidentals to complete the work, see plan sheet 4.)	40	LF		
16	Per VDOT standards	2" Schedule 40 PVC Pipe (Conduit)(Section 1301.53 of the Road and Bridge Standards, Volume II, and the drawings)(includes all labor, material, equipment, testing, and incidentals to complete the work described including all pipe fittings, bends, trenching, cleaning, backfill, bedding material, and all other work required, see plan sheet 5)	100	LF		
17	Per VDOT standards	4" Schedule 40 PVC Pipe (Conduit)(Section 1301.53 of the Road and Bridge Standards, Volume II, and the drawings)(includes all labor, material, equipment, testing, and incidentals to complete the work described including all pipe fittings, bends, trenching, cleaning, backfill, bedding material, and all other work required, see plan sheet 5)	300	LF		
18	Per VDOT standards	6" Schedule 40 PVC Pipe (Conduit)(Section 1301.53 of the Road and Bridge Standards, Volume II, and the drawings)(includes all labor, material, equipment, testing, and incidentals to complete the work described including all pipe fittings, bends, trenching, cleaning, backfill, bedding material, and all other work required, see plan sheet 5)	50	LF		
<p style="text-align: right;">TOTAL AMOUNT OF: \$ _____</p> <p style="text-align: right;">BASE BID</p> <p>I hereby certify that the unit prices and amounts on the above bid items are true and correct. I further certify that the said unit prices and amounts are not disproportionate or unbalanced.</p> <p>Signature _____ Date _____</p>						