
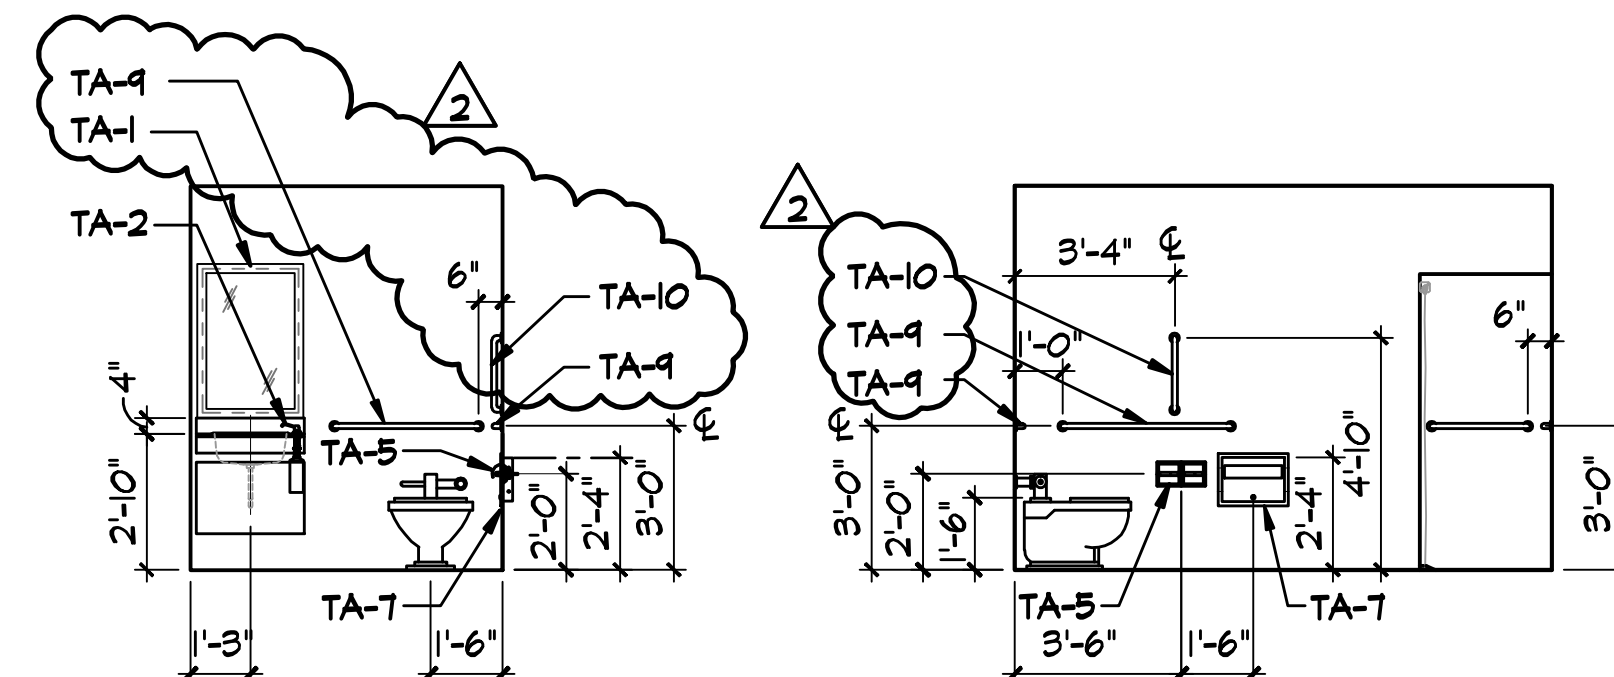



**ENLARGED ADA
TLT PLAN - NEW WORK**

1/4\"/>



**ADA
106
ELEVATION A**

**ADA
106
ELEVATION B**


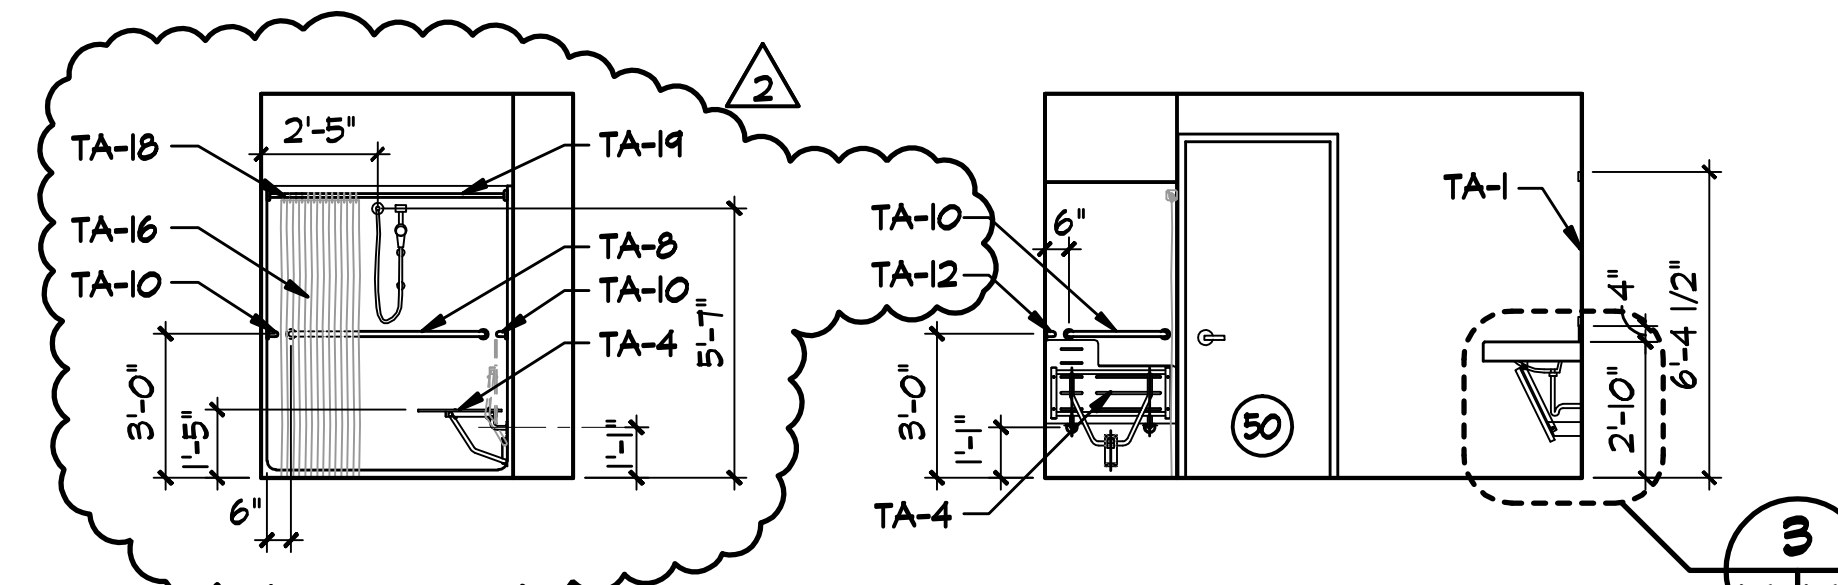


**ADA
106
ELEVATION C**

**ADA
106
ELEVATION D**



**RESTROOM
ELEVATION - NEW WORK**

1/4\"/>

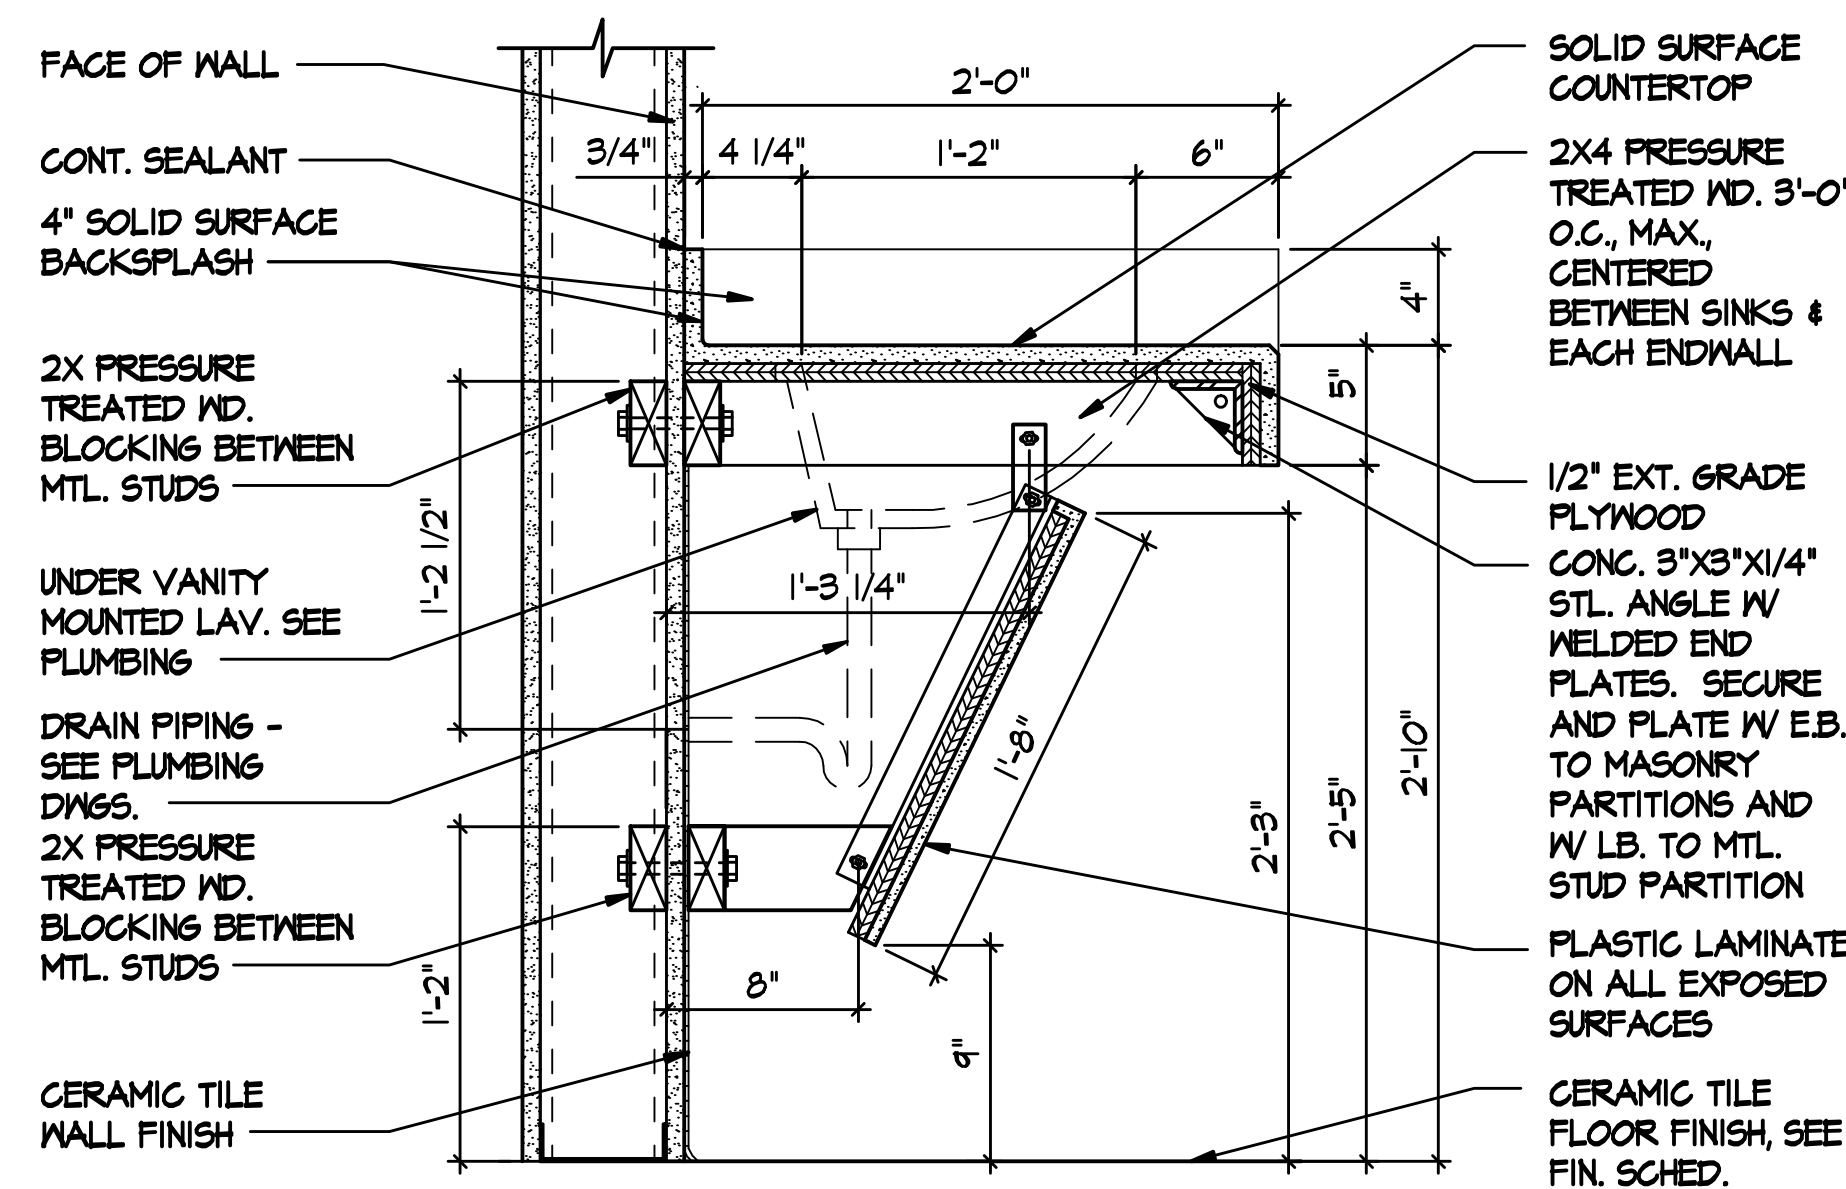



TYP. LAVATORY VANITY DETAIL

1 1/2\"/>

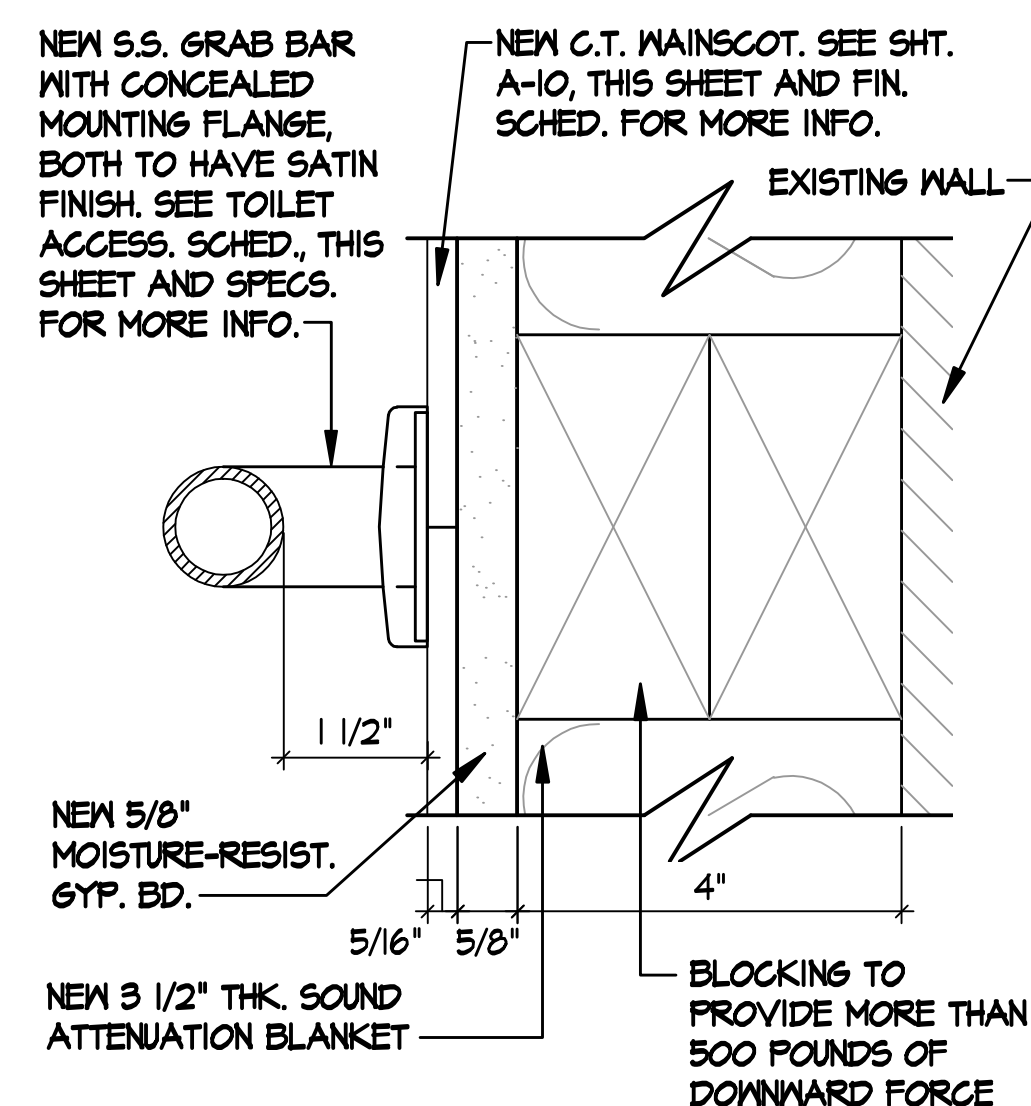

**GRAB BAR
BLOCKING DETAIL**


6\"/>

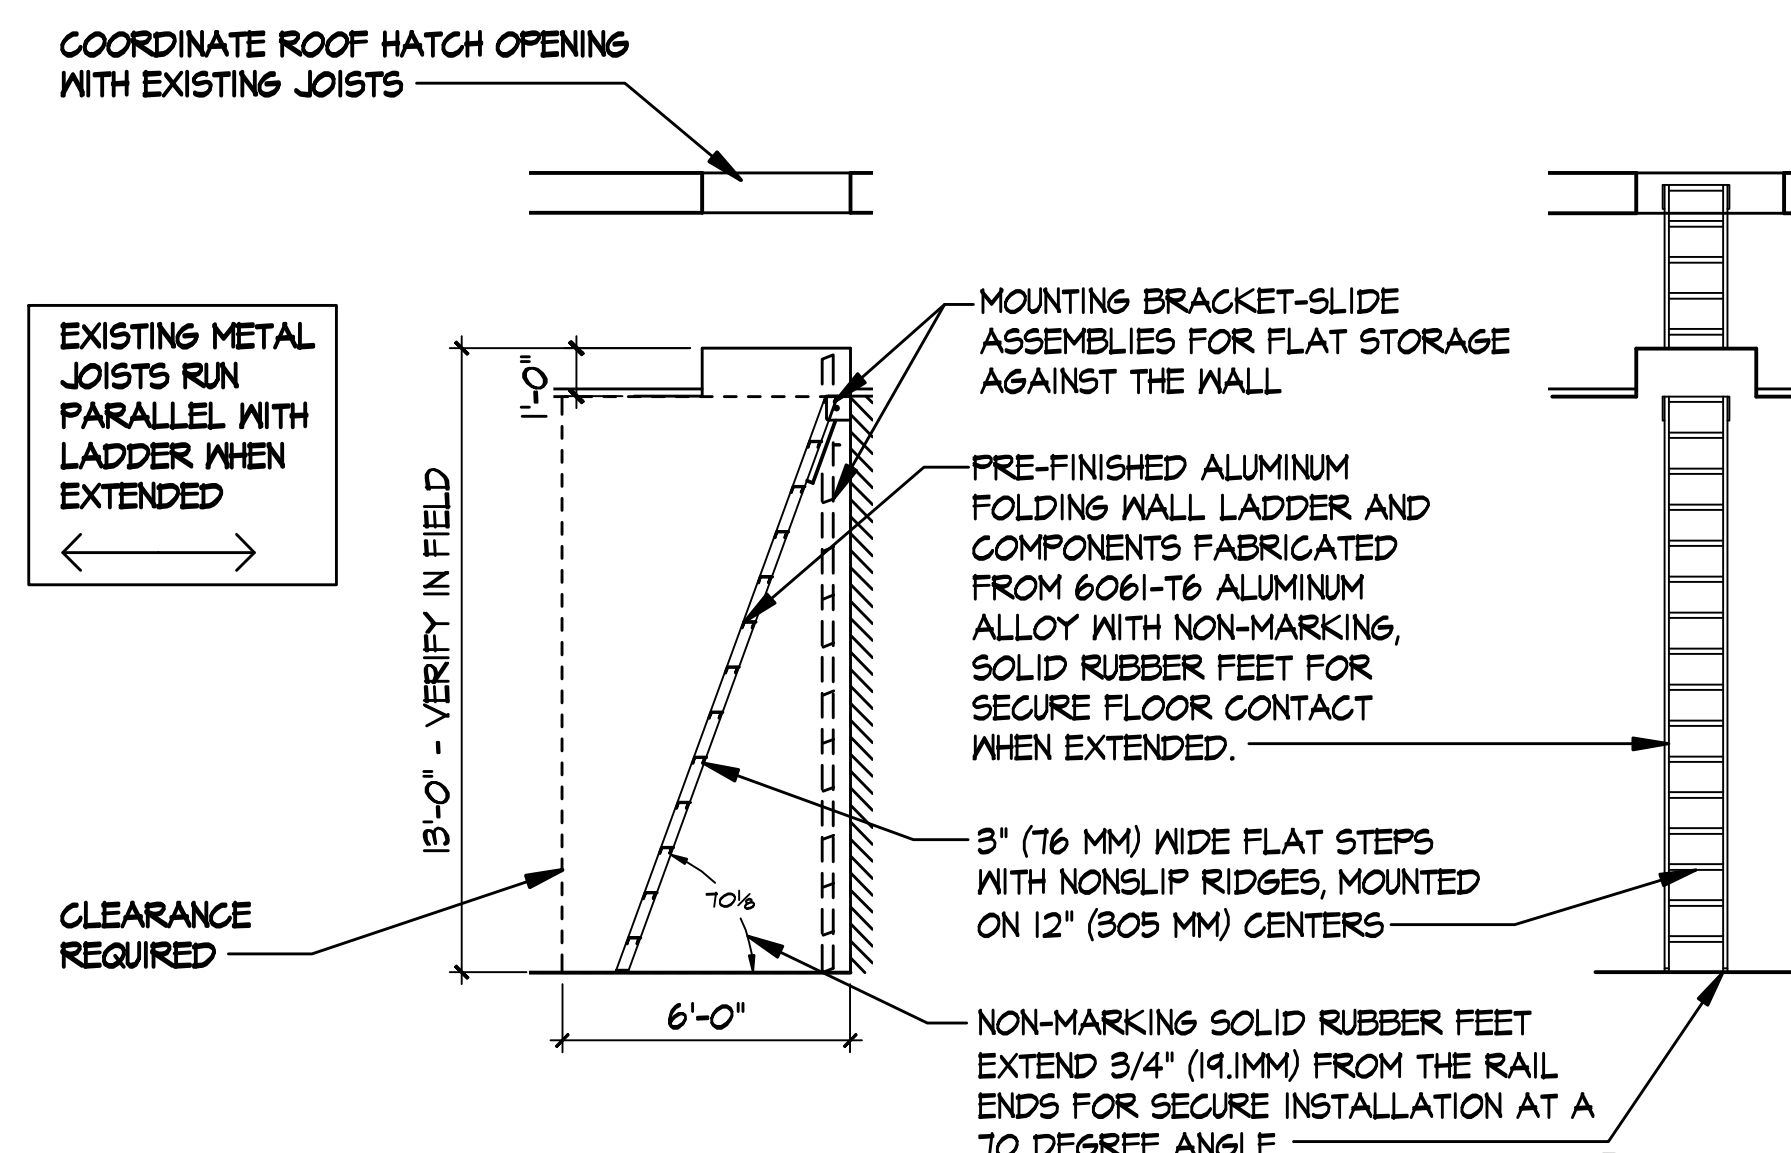

ACCESS LADDER ELEVATIONS

6\"/>

BASIS-OF-DESIGN:
ALACO FOLDING WALL LADDERS - MODEL 460-70% ROOF HATCH ACCESS
OPTIONAL FLUSH HANDRAILS CONSIST OF 1-1/4\"/>




TOILET ACCESSORIES SCHEDULE

MARK	ITEM	MODEL NO. (BOBRICK)	COMMENTS
TA-1	STAINLESS STEEL MIRROR	B-1556 2436	FRAMELESS; TO RECEIVE TRIM
TA-2	SOAP DISPENSER	B-822	COUNTERTOP MOUNTED
TA-3	PAPER TOWEL DISP./WASTE RECEPT.	B-3803	RECESSED
TA-4	FOLDING SHOWER SEAT	B-5181	
TA-5	TOILET TISSUE DISPENSER	B-6997	RECESSED
TA-6	TOILET TISSUE DISPENSER	B-6997	SURFACE-MOUNTED
TA-7	TOILET SEAT COVER DISPENSER	B-3015	RECESSED
TA-8	GRAB BAR	B-6806	18\"/>
TA-9	GRAB BAR	B-6806	24\"/>
TA-10	GRAB BAR	B-6806	36\"/>
TA-11	GRAB BAR	B-6806	42\"/>
TA-12	GRAB BAR	B-6806	48\"/>
TA-13	SANITARY NAPKIN DISPOSAL	B-35303	RECESSED
TA-14	PAPER TOWEL DISPENSER	B-536	COUNTERTOP MOUNTED
TA-15	DOUBLE ROBE HOOK	B-672	AT TOILET STALL DRS (INTERIOR OF STALL); INTERIOR OF DR TO ADA RR
TA-16	FOLD-DOWN PURSE SHELF	B-287	● INTERIOR OF STALL
TA-17	VINYL SHOWER CURTAIN	204-3	
TA-18	SHOWER CURTAIN HOOKS	204-1	
TA-19	SHOWER CURTAIN ROD	B-6107	
TA-20	UNDERLAVATORY GUARDS	105 E-Z	BASIS-OF-DESIGN MANUF: TRUEBRO
TA-21	UTILITY SHELF	B-234	SURFACE-MOUNTED
TA-22	SANITARY NAPKIN DISPOSAL	B-270	SURFACE-MOUNTED

2

NOTES



1. MANUFACTURERS NAMES AND MODEL NUMBERS ARE FOR IDENTIFICATION PURPOSES ONLY; THE LISTING IS NOT INTENDED TO LIMIT SELECTION OF SIMILAR PRODUCTS FROM OTHER MANUFACTURERS. TOILET ACCESSORY ITEM MOUNTING HEIGHTS HAVE BEEN DESIGNED AROUND "BOBRICK" MANUFACTURER. CONTRACTOR SHALL COORDINATE MOUNTING HEIGHTS OF OTHER MANUFACTURERS.
2. PROVIDE AND INSTALL ALL NECESSARY 2X WOOD BLOCKING, ANCHORS AND FASTENERS REQUIRED FOR EACH ACCESSORY. ANCHORS AND FASTENERS USED SHALL BE APPROPRIATE TO THE TYPE OF SUPPORTING WALL CONSTRUCTION AND AS RECOMMENDED BY THE TOILET ACCESSORY MANUFACTURER.
3. INSTALL GRAB BARS TO WITHSTAND A DOWNWARD FORCE OF AT LEAST 250LBF., WHEN TESTED IN ACCORDANCE WITH ASTM F 446.
4. ALL MOUNTING HEIGHTS TO COMPLY WITH MOST CURRENT ANSI GUIDELINES.

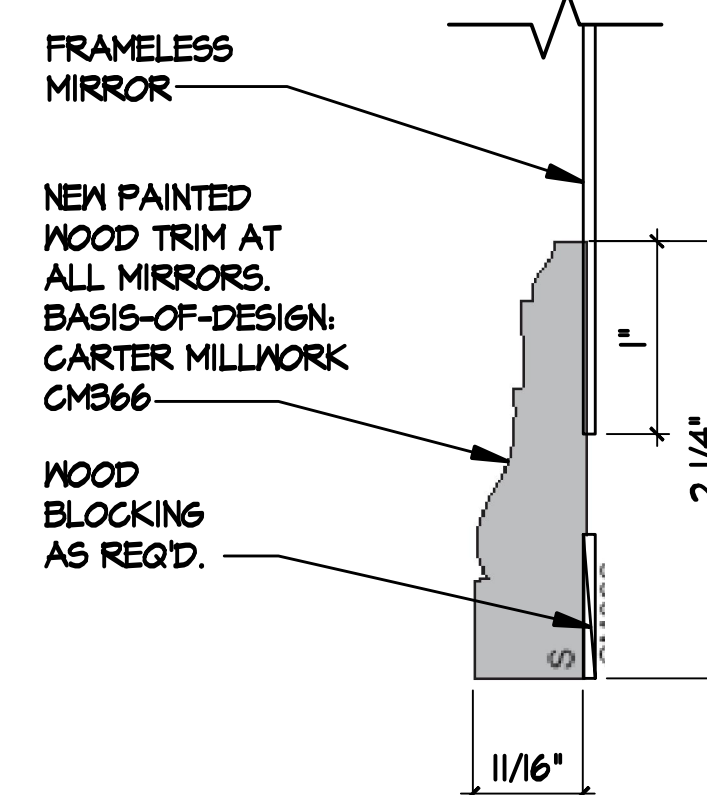

**MIRROR
TRIM DETAIL**

1\"/>

A-58, A-59

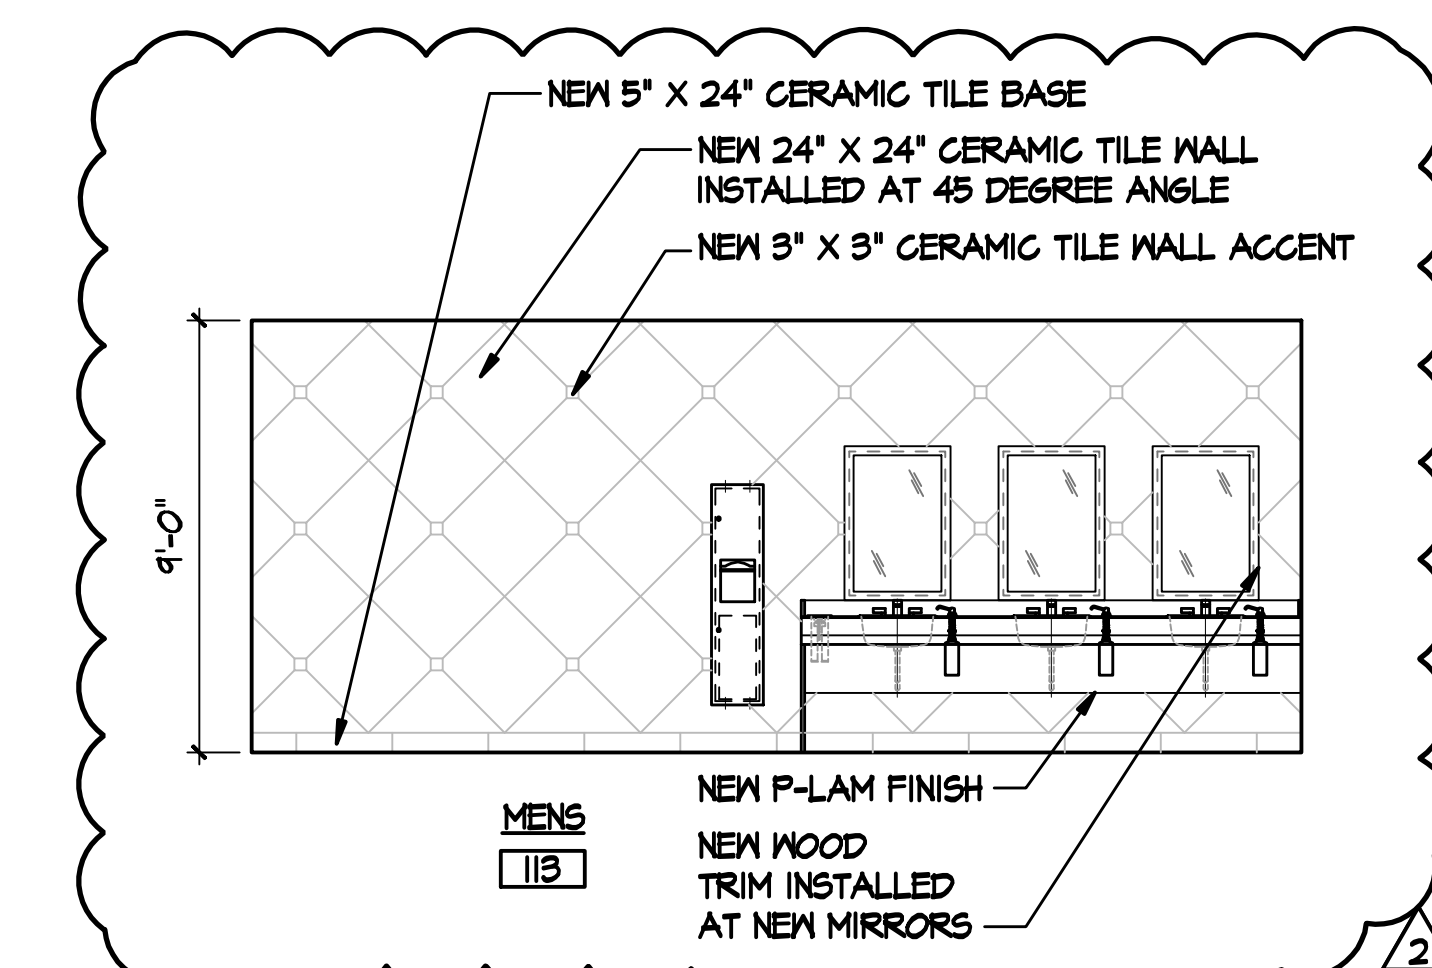


**STANDARD
CERAMIC TILE PATTERN**

1\"/>

*SEE FINISH PLANS FOR CERAMIC TILE FLOOR PATTERNS

A-58, A-59



Loc.	Description	Date	App.
3	ADDENDUM 2	09-23-2009	

Prj. Arch. PECK PECK AND ASSOC
Prj. Eng.
Drawn AP/RV/SF Scale AS NOTED
Checked DKP/GFP Issued 08-24-09
App.

Project Title:
NORTH STREET BUILDING RENOVATION
102 NORTH STREET LEESBURG, VIRGINIA
BID SUBMITAL
County Building No.: **6277**

COUNTY OF LOUDOUN

Project Management By:
PECK • PECK & ASSOCIATES, INC.
architecture planning
graphics interiors
2050 OLD BRIDGE ROAD, WOODBRIDGE, VA 22192
(703) 600-5121 FAX (703) 600-1768

Sheet Contents:
RESTROOM DETAILS

Drawing No.:
A-60