SURVEYED BY_____
SUPERVISED BY_____
DESIGNED BY_____

DESIGN FEATURES RELATING TO CONSTRUCTION OR TO REGULATION AND CONTROL OF TRAFFIC MAY BE SUBJECT TO CHANGE AS DEEMED NECESSARY BY THE DEPARTMENT

REVISED	STATE	FEDERAL AID PROJECT	STATE ROUTE	STATE PROJECT	SHEET NO.
NEW 10/22/08	VA.		7		20(8)

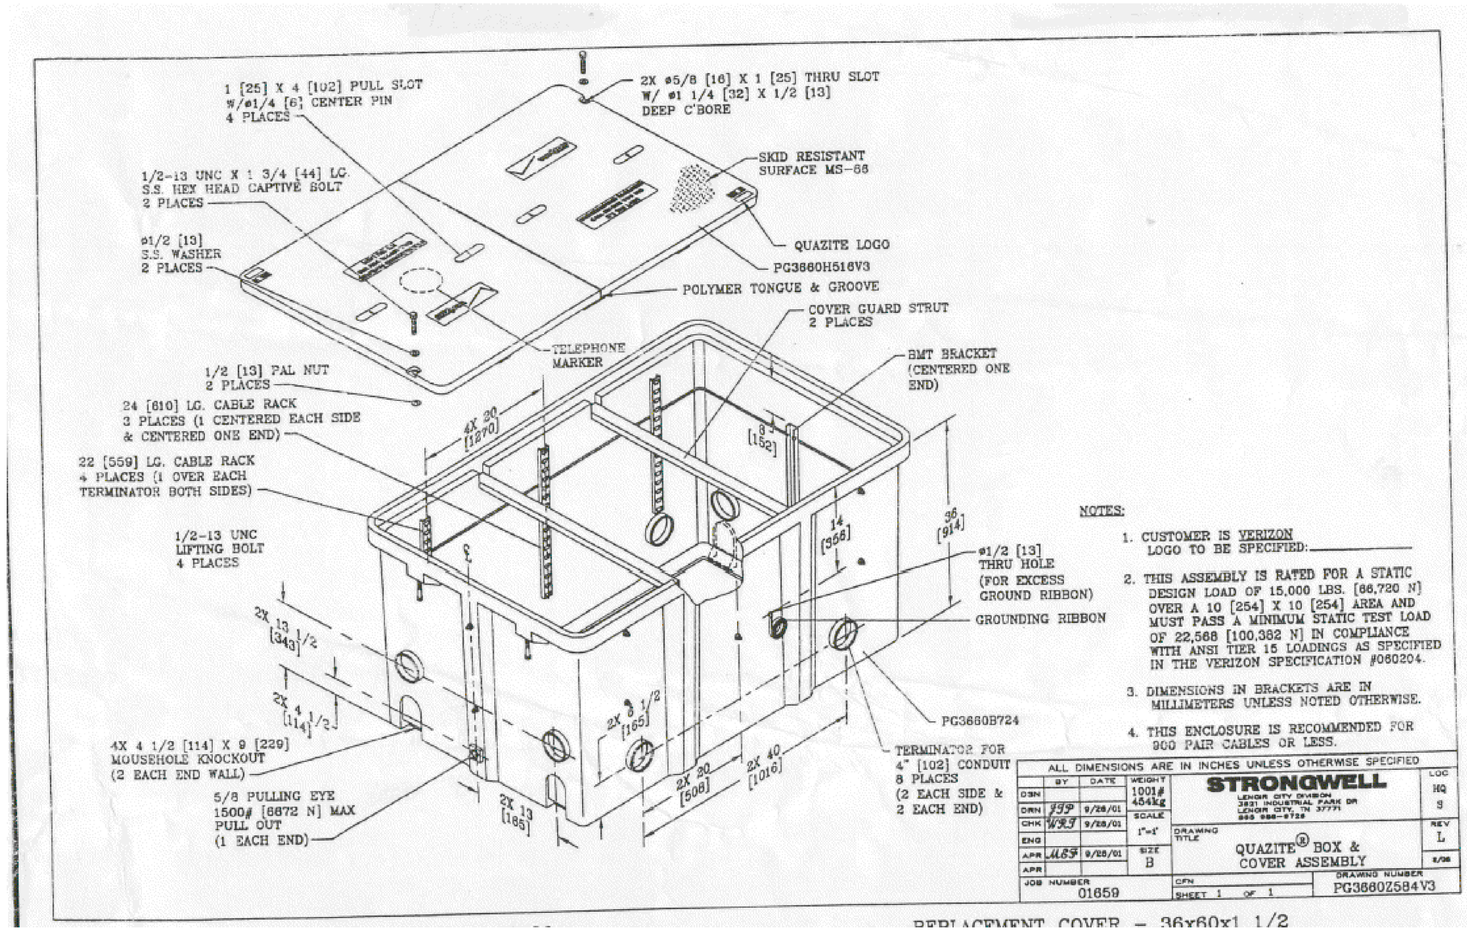

NOTES:

1. CUSTOMER IS VERIZON
   LOGO TO BE SPECIFIED:_____
2. THIS ASSEMBLY IS RATED FOR A STATIC DESIGN LOAD OF 15,000 LBS. [66,720 N] OVER A 10 [254] X 10 [254] AREA AND MUST PASS A MINIMUM STATIC TEST LOAD OF 22,568 [100,362 N] IN COMPLIANCE WITH ANSI TIER 15 LOADINGS AS SPECIFIED IN THE VERIZON SPECIFICATION #060204.
3. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
4. THIS ENCLOSURE IS RECOMMENDED FOR 900 PAIR CABLES OR LESS.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

	BY	DATE	WEIGHT	STRONGWELL	LOC
DSN			1001# 454kg	LENOIR CITY DIVISION 3821 INDUSTRIAL PARK DR LENOIR CITY, TN 37771 865 986-8722	HQ S
DRN	JSP	9/28/01	SCALE 1"=1'	DRAWING TITLE QUAZITE® BOX & COVER ASSEMBLY	REV L
CHK	WBJ	9/28/01			
ENG					
APR	MBS	9/28/01	SIZE B		8/98
APR					

JOB NUMBER 01659 | CFN | SHEET 1 OF 1 | DRAWING NUMBER PG3660Z584V3

REPLACEMENT COVER - 36x60x1 1/2

ON-TIME UTILITY SOLUTIONS, LLC
44330 MERCURE CIRCLE, SUITE 140
DULLES, VIRGINIA 20166

PLAN NO.	PROJECT	FILE NO.	SHEET NO.
			20(8)