


SURVEYED BY _____
SUPERVISED BY _____
DESIGNED BY _____

DESIGN FEATURES RELATING TO CONSTRUCTION
OR TO REGULATION AND CONTROL OF TRAFFIC
MAY BE SUBJECT TO CHANGE AS DEEMED
NECESSARY BY THE DEPARTMENT

REVISED	STATE	FEDERAL AID PROJECT	ROUTE	STATE PROJECT	SHEET NO.
NEW 10/22/08	VA.		7		20(4)

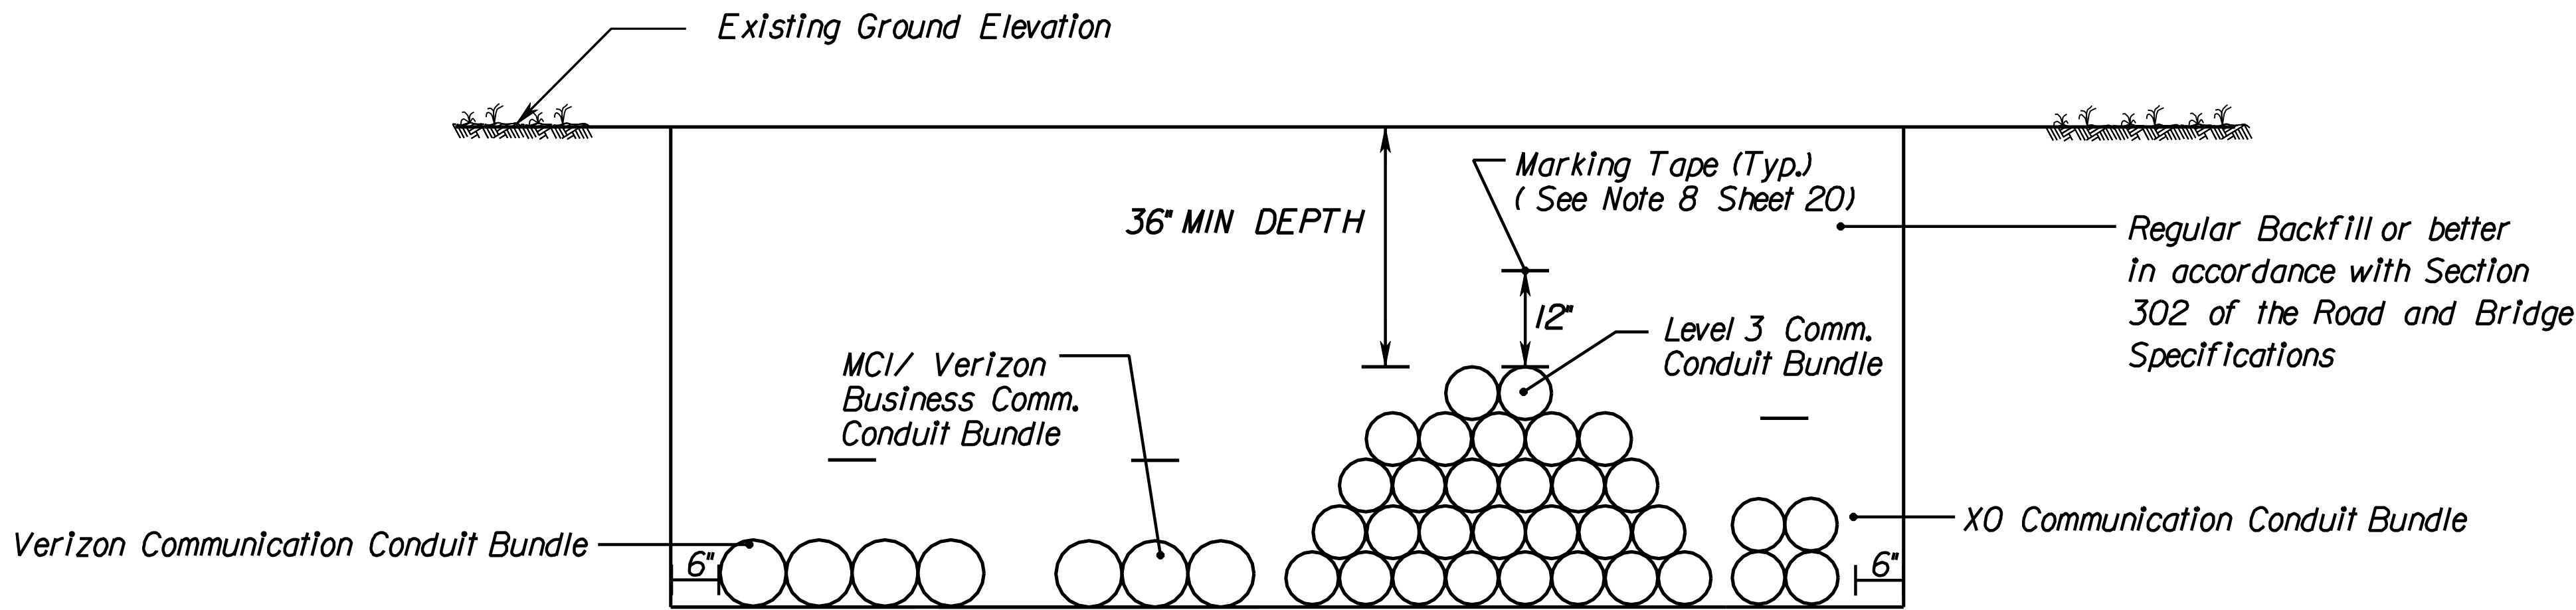

DUCT BANK TRENCH DETAIL SOUTHEAST QUADRANT ALONG ROUTE 7

- NOTES:
1. AFTER INSTALLATION, ALL DUCT MUST BE THOROUGHLY CLEANED TO ENSURE THAT ALL SMALL PEBBLES, SAND OR OTHER FOREIGN MATERIAL ARE REMOVED BEFORE CABLE IS INSTALLED. ALL CONDUITS ARE THEN TO CONTAIN "POLYOLEFIN" 1000 POUND STRESS PULL LINES, TO ACCOMMODATE THE PULLING CABLE.
 2. SUBSTITUTE NO. 57 STONE FOR AGGREGATE MATERIAL 21A IF STANDING OR RUNNING WATER IS PRESENT WHEN UTILITY TRENCH IS EXCAVATED AT NO ADDITIONAL COST TO THE DEPARTMENT. THE DEPTH OF EXCAVATION MAY NEED TO BE INCREASED WHERE SHOWN ON THE PLANS IN ORDER TO REMOVE UNSUITABLE MATERIAL. UNSUITABLE MATERIAL SHALL BE REMOVED AND DISPOSED OF OFFSITE AND REPLACED WITH AGGREGATE NUMBER 57 STONE, THE COST OF WHICH IS INCIDENTAL TO COMMUNICATION DUCT BANK.

express-tek
EXPRESS TECHNOLOGIES, INC.
1127 INTERNATIONAL PARKWAY SUITE 293
FREDERICKSBURG, VA 22406
540.752.6691 (O) 540.752.6694 (F)

OUS ON-TIME UTILITY
SOLUTIONS, LLC
44310 MERCURY CIRCLE, SUITE 140
DULLES, VIRGINIA 20146

COMM. UTILITY RELOCATION PLAN
COMMUNICATION DUCT BANK DETAILS

PLAN NO.	PROJECT	FILE NO.	SHEET NO.
			20(4)