

#### GENERAL NOTES:

- A. NOT ALL INFORMATION IS CALLED OUT ON THIS DRAWING IN ROOM 089. REFER TO AND COORDINATE WITH A-800 SERIES DRAWINGS AND PLUMBING, MECHANICAL, ELECTRICAL AND FIRE ALERTING DRAWINGS. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR AND ALL SUB-CONTRACTORS TO COORDINATE THEIR WORK WITH THE WORK OF OTHER TRADES.
- B. TOP OF FD TO BE  $\frac{1}{2}$ " BELOW FINISH FLOOR TO ENSURE PROPER DRAINAGE

#### NOTES THIS DRAWING:

- 1 WALL MOUNTED HANDRAIL - REFER TO DETAIL 13/A-401
- 2 8' LONG RAMP SLOPING DOWN 1" PER FOOT
- 3 1'-8" X 1'-4" OPENING FOR RECESSED BOX REFER TO SECTION 13/A-702
- 4 6" WIDE "WHITE" TRAFFIC STRIPING - CONFIRM FINAL LAYOUT AND COLOR WITH OWNER - TYPICAL
- 5 4" DOWNSPOUT
- 6 LINEAR FLOOR DRAIN - REFER TO PLUMBING
- 7 LINE OF ROOF OVERHANG ABOVE
- 8 LINE OF CURB - REFER TO CIVIL
- 9 APPARATUS BAY APRON - REFER TO STRUCTURAL DRAWINGS FOR THE FIRST 5'-0" FEET AND CIVIL FOR THE REMAINING CONCRETE APRON
- 10 CONCRETE WALKWAY - REFER TO CIVIL
- 11 PROVIDE WOOD BLOCKING FOR 48" X 30" WALL MOUNTED MARKER BOARD
- 12 PROVIDE WOOD BLOCKING FOR 48" X 30" WALL MOUNTED TACK BOARD
- 13 REFER TO STRUCTURAL DRAWINGS FOR SLOPE OF SLAB AND LOCATION OF CONTROL JOINTS
- 14 WALL HYDRANT - REFER TO PLUMBING
- 15 GEAR LOCKERS - REFER TO THE A-800 SERIES DRAWINGS
- 16 8" DIAMETER BOLLARD - REFER TO DETAIL 9/A-061 - TYPICAL
- 17 4" HOUSEKEEPING PAD
- 18 FLOOR SINK - SEE PLUMBING DRAWINGS

#### ROOM SCHEDULE

065	RESCUE OPERATIONS
066	RESCUE WATCH
071	BUNK
072	BUNK
073	TOILET
074	TOILET
075	BUNK
076	BUNK
077	HALL
078	HALL
079	HALL
080	BUNK - HC
081	BUNK
082	TOILET - HC
083	CORRIDOR
084	CORRIDOR
085	RAMP
086	READY GEAR
087	READY GEAR
088	RAMP
089	APPARATUS BAY
090	VESTIBULE
091	OXYGEN STORAGE
092	BAY STORAGE
093	DECONTAMINATION
093A	DECONTAMINATION
094	EMS STORAGE
095	SPRINKLER



HUGHES GROUP ARCHITECTS

22830 DAVIS DRIVE, SUITE 175  
STERLING, VIRGINIA 20164  
703.437.6600

CIVIL:  
ALPHA ENGINEERING  
21351 Ridgeway Circle, Suite 200  
Sterling, VA 20166  
(703) 450-0800

STRUCTURAL:  
EHLERT-BRYAN  
1451 Daley Madison Blvd, Suite 200  
McLean, VA 22101  
(703) 827-9552

MECHANICAL/ELECTRICAL:  
BRINJAC ENGINEERING  
4000 Albemarle Street, NW, Suite 305  
Washington, DC 20016  
(202) 237-2750




# PURCELLVILLE FIRE AND RESCUE

500 MAPLE AVE. BUILDING #  
PURCELLVILLE, VIRGINIA

## FLOOR PLAN - PART D

#### KEY PLAN

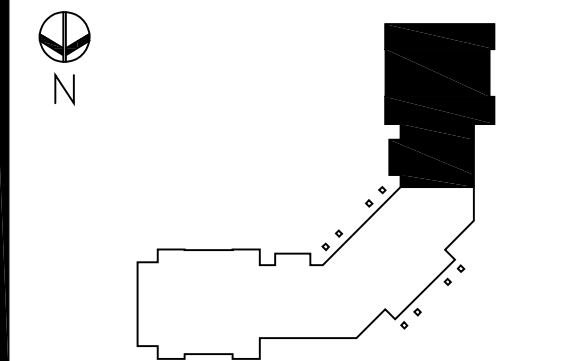

#### REVISIONS:

ISSUES:  
9-26-07 BID SET

#### STAMP AND SEAL:

DATE: 9-26-07 SCALE: 1/4" = 1'-0"

PROJECT NO. 0611

SHEET:

A-114