


RELAY PANEL SCHEDULE		
RELAY	ALERT TYPE	AREA SERVED
R1	FIRE	BATTALLION CHIEF
R2	FIRE	TOILETS/SHOWERS/LOCKERS – FIRE SIDE
R3	FIRE	SLEEPING ROOMS – FIRE AREA
R4	RESCUE	SLEEPING ROOMS – FIRE AREA
R5	FIRE	SLEEPING ROOMS – RESCUE AREA
R6	RESCUE	SLEEPING ROOMS – RESCUE AREA
R7	RESCUE	TOILETS/SHOWERS/LOCKERS – RESCUE SIDE
R8	FIRE	COMMON AREAS
R9	RESCUE	COMMON AREAS
R10	–	SPARE RELAY
R11	–	SPARE RELAY
R12	–	SPACE FOR FUTURE RELAY
R13	–	SPACE FOR FUTURE RELAY
R14	–	SPACE FOR FUTURE RELAY
R15	–	SPACE FOR FUTURE RELAY
R16	–	SPACE FOR FUTURE RELAY

NOTES: 1. RELAY CABINET TO BE MOUNTED ON PLYWOOD BACKBOARD SHOWN. LOCATION ON BOARD AS DIRECTED IN THE FIELD.
2. SEE POWER DRAWINGS FOR 120 VOLT FEED TO RELAY CABINET.

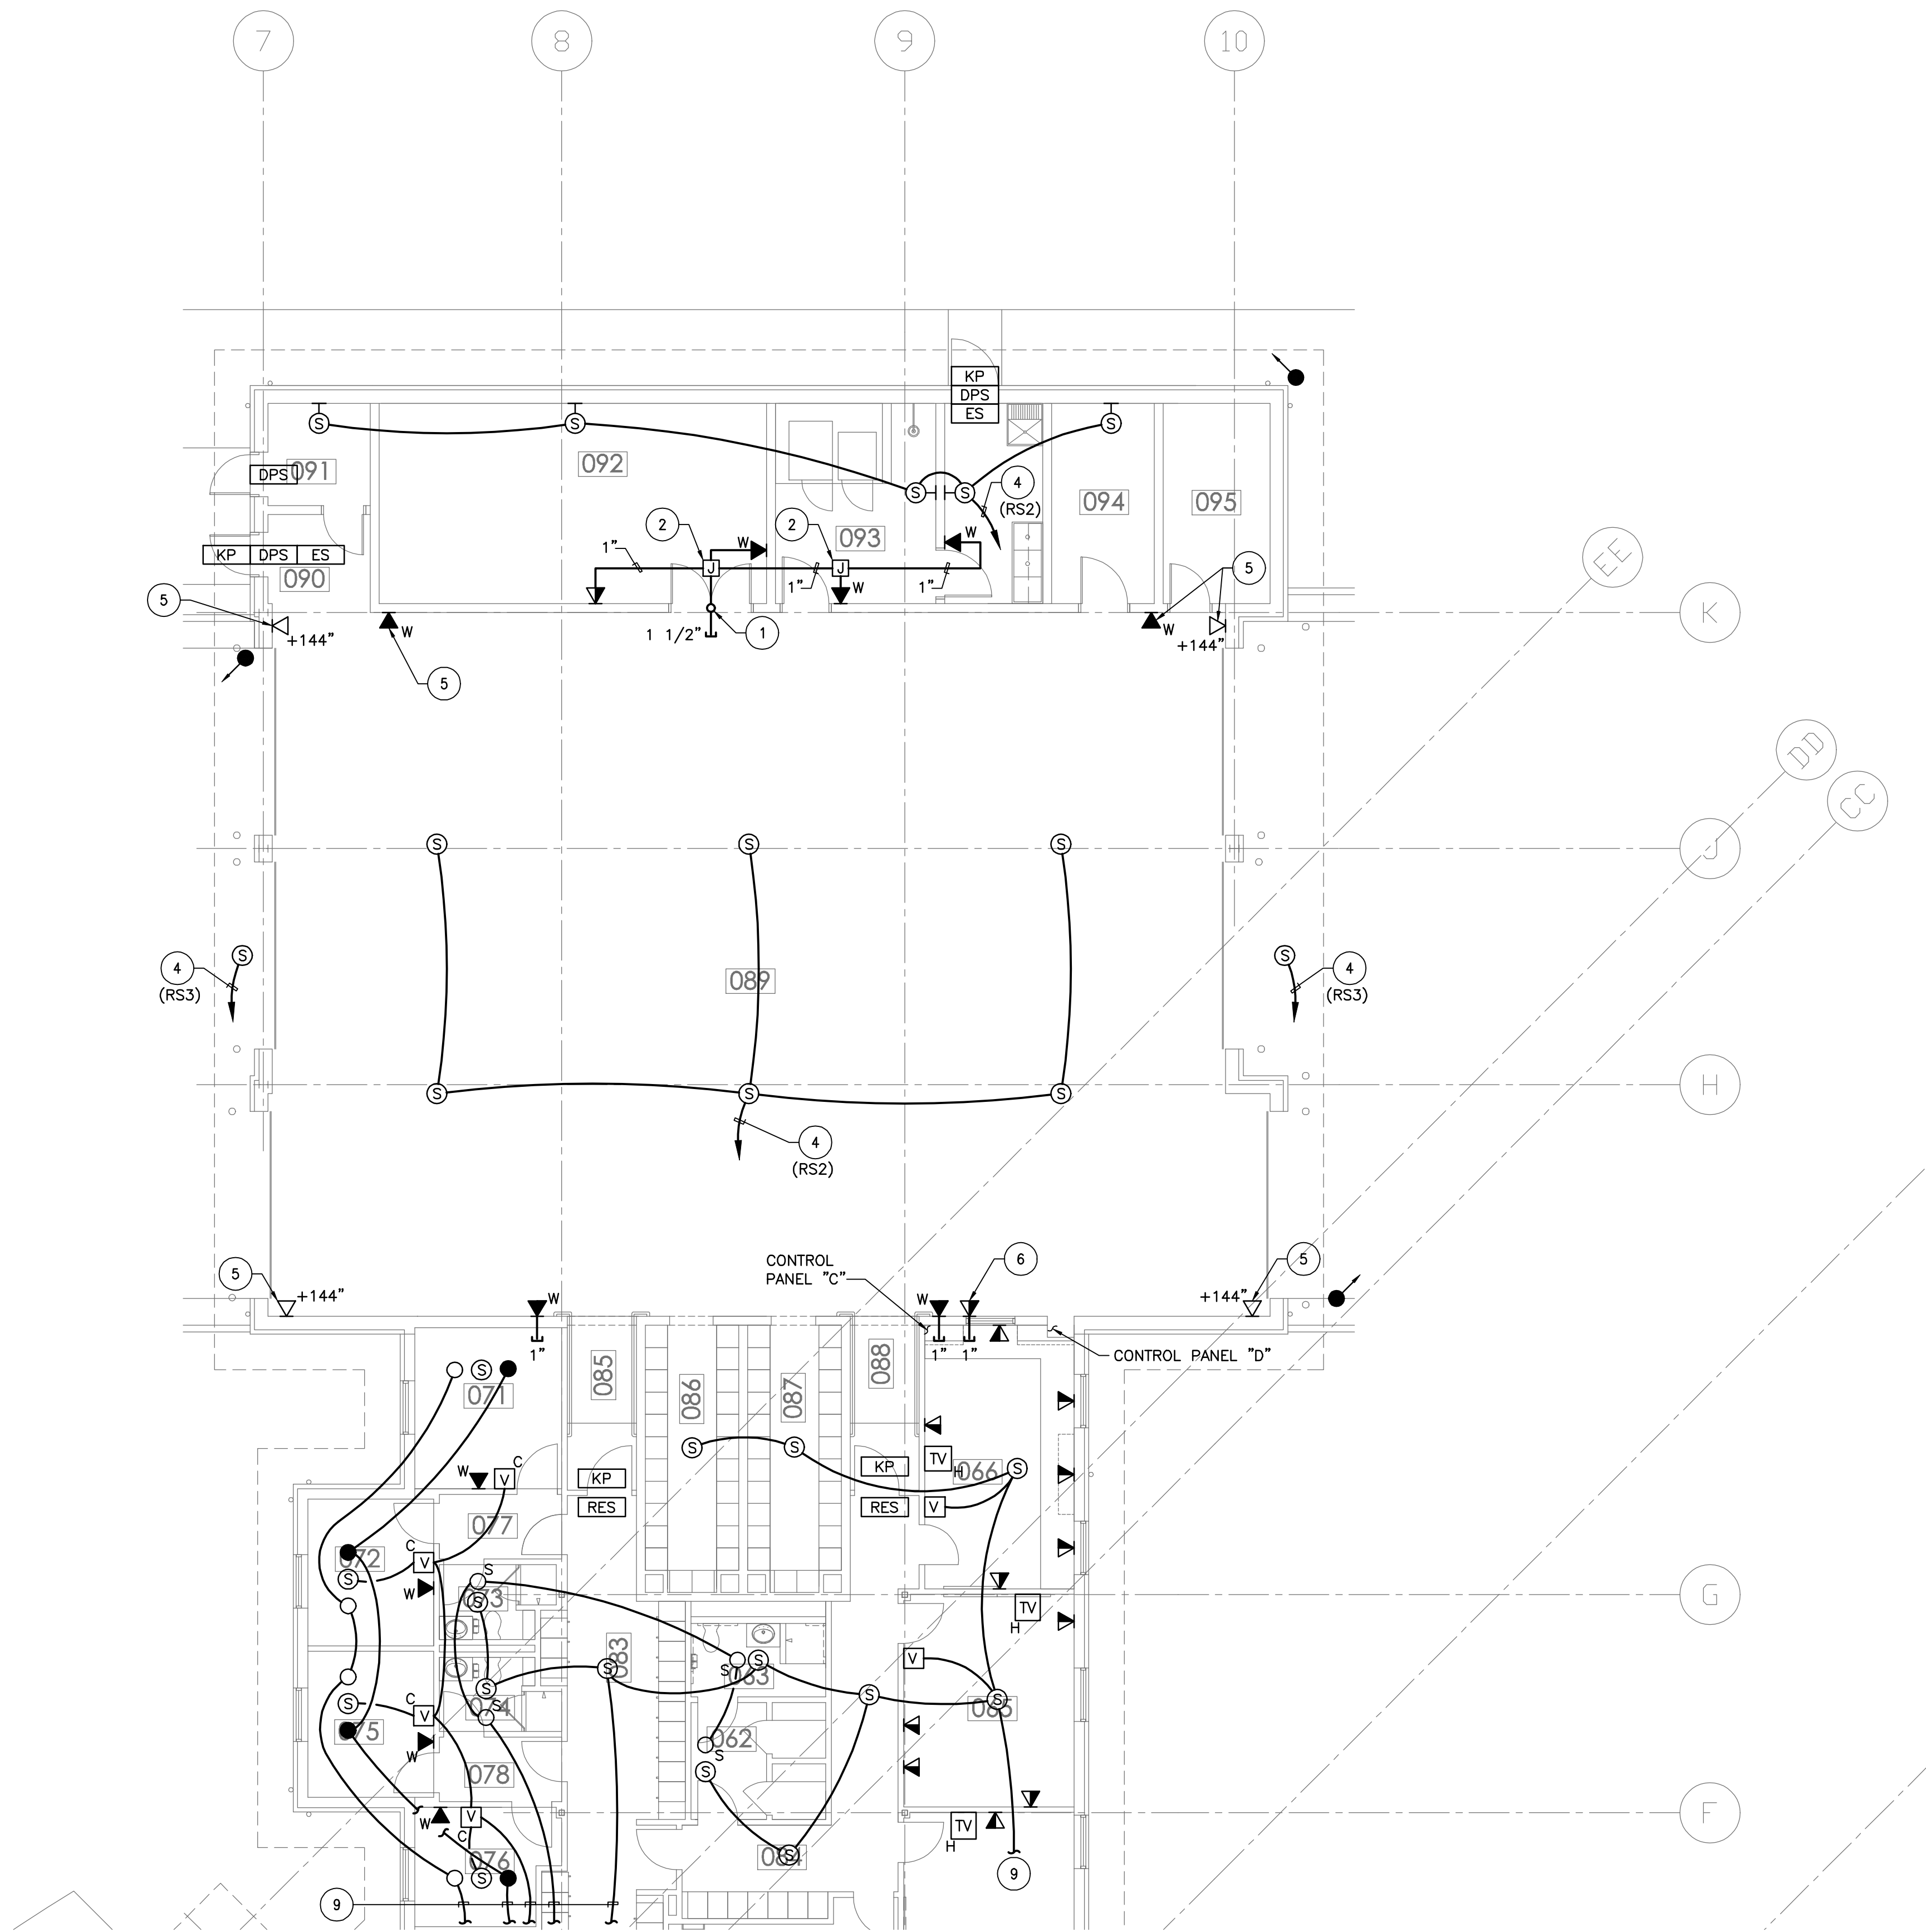

PARTIAL PLAN – FIRST FLOOR – AREA B – TELECOM/FIRE ALERTING
SCALE: 1/8" = 1'-0"

GENERAL NOTES:


- SEE DRAWING NO. E-300 FOR FIRE ALERTING, TELECOM & SECURITY SYSTEMS LEGEND.
- ALL DATA, VOICE & DATA/VOICE OUTLETS TO BE 11B BOXES WITH SINGLE GANG EXTENSIONS WITH 1" CONDUIT FROM BOX TO ACCESSIBLE CEILING SPACE. PROVIDE NYLON PULL ROPE IN CONDUIT.
- ALL VIDEO OUTLET BOXES TO BE 11B BOXES WITH 2 GANG EXTENSIONS WITH 1 1/4" CONDUIT FROM BOX TO ACCESSIBLE CEILING SPACE. PROVIDE NYLON PULL ROPE IN CONDUIT.
- SPEAKER INPUT SELECTOR SWITCH TO BE 4 POSITION – FIRE, RESCUE, ALL AND OFF – SWITCH OUTPUT TO BE WIRED TO VOLUME CONTROL AND FROM VOLUME CONTROL TO SPEAKER. "ALL" POSITION ALLOWS FIRE AND RESCUE SIGNALS TO DRIVE SPEAKER. PROVIDE ENGRAVED NAMEPLATE SHOWING SPEAKER POSITIONS.
- SECURITY EQUIPMENT IS INDICATED FOR INFORMATIONAL PURPOSES ONLY. SEE ACCESS SECURITY, INC. "SEC" SERIES DRAWINGS AND SPECS FOR DETAILS SHOWING BOX AND CONDUIT REQUIREMENTS TO BE PROVIDED UNDER THE ELECTRICAL WORK.
- FOR KEYED NOTES APPLICABLE TO DRAWING NOS. E-300 AND E-301, SEE DRAWING NO. E-300.

PURCELLVILLE FIRE AND RESCUE



500 MAPLE AVE. BUILDING #
PURCELLVILLE, VIRGINIA
PARTIAL PLAN - FIRST FLOOR - AREA B -
TELECOM/ FIRE ALERTING

KEY PLAN

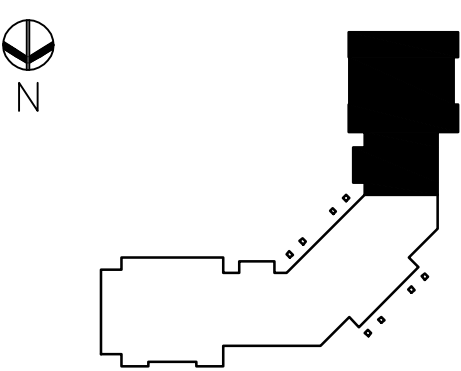

REVISIONS:

ISSUES:
9-26-07 BID SET

STAMP AND SEAL:

0 8 12 16 24

NOTE:
CONTRACTOR SHALL CHECK &
VERIFY ALL DIMENSIONS &
EXISTING CONDITIONS AT SITE.

BID SET

DATE:
09-26-07

SCALE:
AS NOTED

PROJECT NO.
0611

SHEET:
E-301